

Green Land
K O M A R O V





BOLLARD • STÄLPIŞOR

Code Finishing


- 90428** ■ Dark Grey
- 90429** ■ Dark Brown

LED type	Input voltage	Power	CCT	Luminous Flux Source/system	Optics	CRI
SMD LED 2835, 15 pcs	220-240V	8W	3000K	990/425 lm	120°	80

Dimension



Photometry






REFERENCE	K	LED WATT	LUMENS	FINISH	HEIGHT
6771	3000K	13W	980lm	Gris Oscuro/Madera-Dark Grey/Wood	350
6772	3000K	13W	980lm	Gris Oscuro/Madera-Dark Grey/Wood	600
6773	3000K	13W	980lm	Gris Oscuro/Madera-Dark Grey/Wood	1000
100-240V- 50/60Hz CRI: 80				Aluminio/PC - Aluminium/PC	



ErP COMPLIANT DRIVER TÜV RoHS COMPLIANT

CHEVALIER

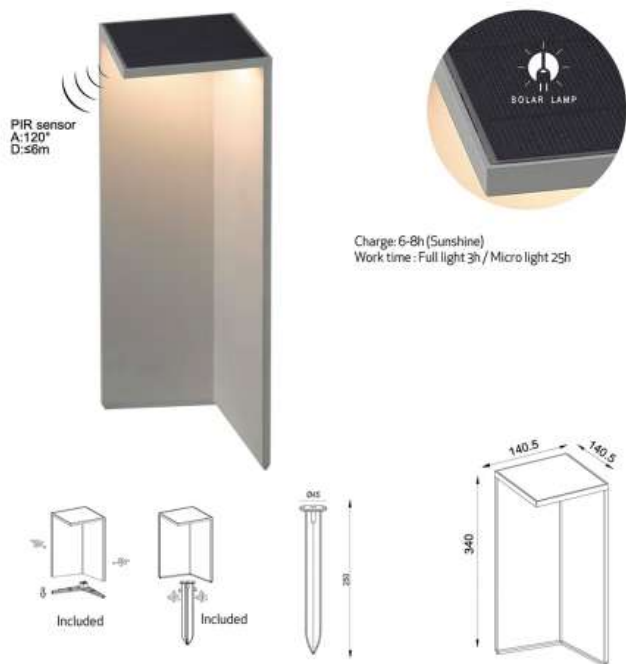

Charge: 6-8h (Sunshine)
Work time: Full light 3h / Micro light 25h

REFERENCE	K	LED WATT	LUMENS	FINISH
7088	3000K	2.2W	188lm	Grafito-Graphite
DC 3.7V CRI: 80				Aluminio-Aluminium






Wiki




BOLLARD - STÅLPÏSOR

Color: Frothing
 90424: Dark Grey




BOLLARD - STÅLPÏSOR

Color: Frothing
 90425: Dark Grey



Bollards for outdoor equipped with SMD LEDs and integrated driver. Die cast aluminium body electrostatically painted in dark grey, opal polycarbonate diffuser.





7045
pág. 402

REFERENCE	K	LED WATT	LUMENS	FINISH
8151	3000K	12W	1020lm	Gris oscuro-Dark grey
		220-240V - 50/60Hz CRI ≥ 80		Aluminio/PC-Aluminium/PC



REFERENCE	K	LED WATT	LUMENS	FINISH
New 8478	3000K	7W	740lm	Negro-Black
New 8479	3000K	7W	740lm	Corten-Corten
		220-240V - 50/60Hz CRI ≥ 80		Aluminio-Aluminium



Woody



Woody



Outdoor light fixtures equipped with SMD LEDs. Die cast aluminium body electrostatically painted in dark grey with decorative wood printing, opal polycarbonate diffuser.



BOLLARD - STÄLPISJÖR

Code Finishing
W0512 ■ Dark Grey



LED type	Input voltage	Power	CCT	Luminous Flux SourceSystem	CRI
SMD 2835 LED, 48 pcs	100-240V 50/60Hz	10W	3000K	132/650lm	80

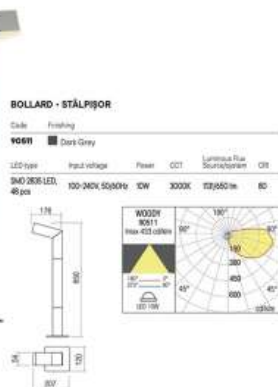

BOLLARD - STÄLPISJÖR

Code Finishing
W0511 ■ Dark Grey


LED type	Input voltage	Power	CCT	Luminous Flux SourceSystem	CRI
SMD 2835 LED, 48 pcs	100-240V 50/60Hz	10W	3000K	132/650lm	80

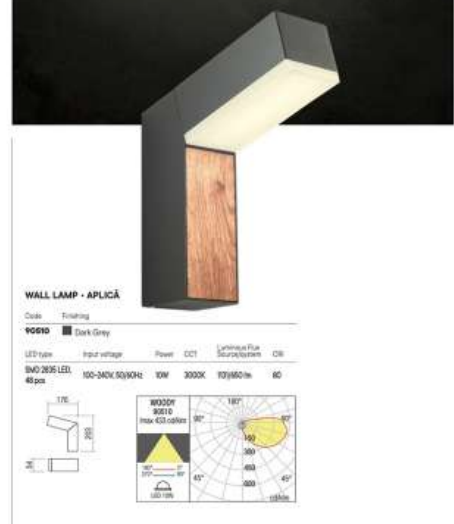

WALL LAMP - APLICĂ

Code Finishing
W0510 ■ Dark Grey

LED type	Input voltage	Power	CCT	Luminous Flux SourceSystem	CRI
SMD 2835 LED, 48 pcs	100-240V 50/60Hz	10W	3000K	132/650lm	80



AKITA

Piqueta exterior-Outdoor spike

Outdoor



REFERENCE	K	LED WATT	LUMENS	SIZE	FINISH
8480	3000K	12W	880lm	600 mm	Negro-Black
8481	3000K	12W	880lm	800 mm	Negro-Black
220-240V - 50/60Hz CRI > 80					Aluminio-Aluminum



QUEBEC

Piqueta exterior-Outdoor spike

Outdoor




REFERENCE	BULB NO INCLUDED	FINISH
8155	3L + GU10	Negro-Black
máx. 12W LED (No incl) 100-240V - 50/60Hz Aluminio-Aluminum		



Bombillas recomendadas - Suggested bulbs

K	Watt LED	On/Off	Phase cut	Lumens
2700K	7W	R09254	R09257	510lm
3000K	7W	R09255	R09258	540lm
4000K	7W	R09256	R09259	570lm





Wald

Outdoor light fixtures with indirect light distribution, equipped with COB LED. Die cast aluminium body electrostatically painted in dark grey with interior decorative wood printing, transparent tempered glass diffuser.




WALL LAMP - APJICĂ

Color: Finishing

905004 Dark Grey

LED type	Input voltage	Power	DCCT	Luminous flux lm / lm / system	Optics	CR
COB LED Type	100-240V 50/60Hz	10W	3000K	986/800 lm	037°	80




BOLLARD - STĂLPĂȘOR

Color: Finishing


905009 Dark Grey

LED type	Input voltage	Power	DCCT	Luminous flux lm / lm / system	Optics	CR
COB LED Type	100-240V 50/60Hz	10W	3000K	986/800 lm	037°	80






IP65

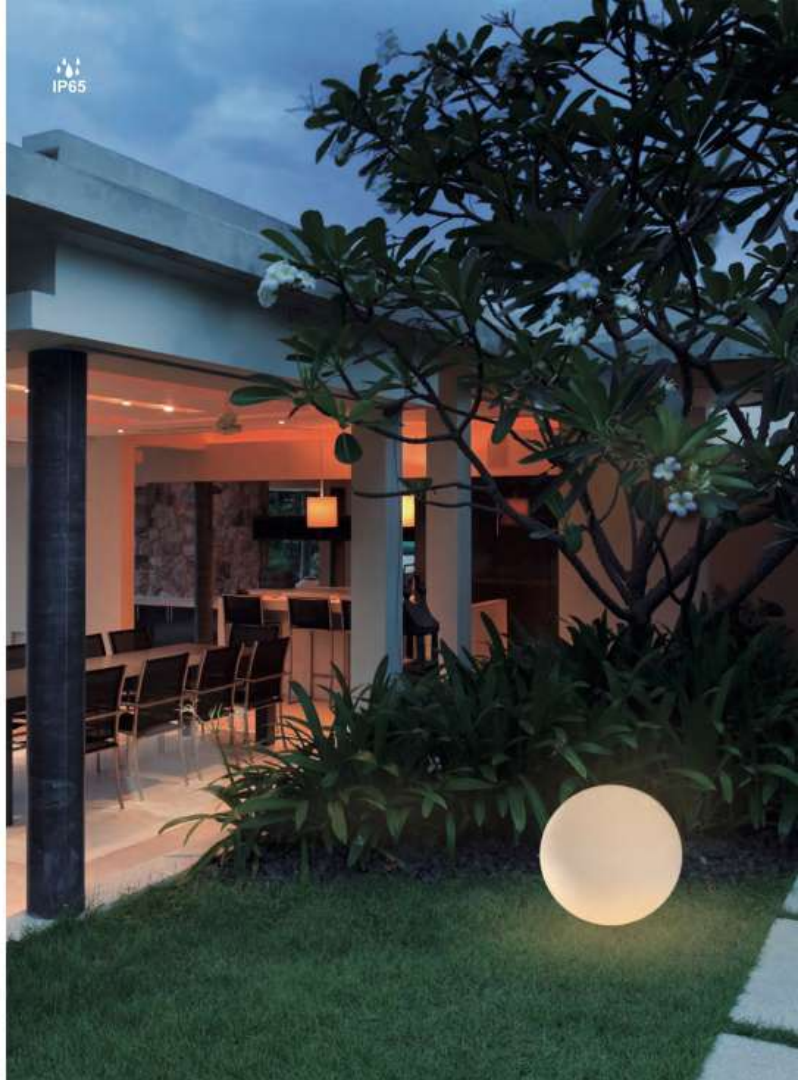


REFERENCE	BULB NO INCLUDED	FINISH	
1388	1L + E27	Blanco-White	ø350
1391	1L + E27	Blanco-White	ø400
1394	1L + E27	Blanco-White	ø500

máx. 20W LED (No incl) 100-240V - 50/60Hz PEABS-PEABS

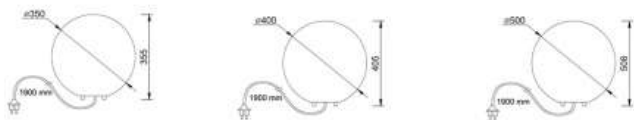

Complementos exterior *NO INCLUIDO-Outdoor complements *NOT INCLUDED

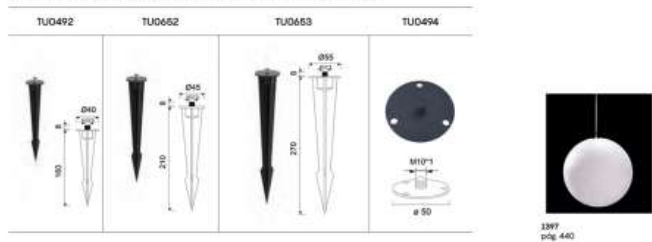

IP65




REFERENCE	BULB NO INCLUDED	FINISH
7107	1L + GU10	Gris Piedra-Stone Grey

máx. 12W LED (No incl) 100-240V - 50/60Hz Cemento liso-Smooth cement



Bombillas recomendadas-Suggested bulbs

K	Watt LED	On/Off	Phase cut	Lumens
2700K	7W	R09254	R09257	510lm
3000K	7W	R09255	R09258	540lm
4000K	7W	R09256	R09259	570lm





Crayon

Series of exterior light fittings, housing of die cast aluminium electrostatically painted in dark grey or dark brown and opal polycarbonate diffuser.



WALL LAMP - APLICĂ

Code Finishing

- 9073 Dark Grey
- 9074 Dark Brown

Power Socket Input voltage Input frequency

1 x max. 40W E27 230V 50Hz



BOLLARD - STĂLPĂȘOR

Code Finishing Height

- 9075 Dark Grey 500
- 9076 Dark Brown 500
- 9077 Dark Grey 800
- 9078 Dark Brown 800

Power Socket Input voltage Input frequency

1 x max. 40W E27 230V 50Hz



Outdoor

Architectural lighting

Wald

GR

IP65 LED D

■ Body material - metal, color - graphite. High level of protection against dust and moisture IP65. Resistant to corrosion and temperature extremes. LED light source with a neutral color temperature of 3000K.

■ Rahmenmaterial: Metall, Farbton: Graphit. Hoher Schutzgrad gegen Staub und Feuchtigkeit. IP65. Beständig gegen Korrosion und Temperaturschwankungen. LED-Lichtquelle mit einer neutralen Farbtemperatur von 3000K.

■ Materiale del corpo - metallo, colore - grafite. Alto livello di protezione contro polvere e umidità IP65. Resistente alla corrosione e agli sbalzi di temperatura. Sorgente luminosa a LED con temperatura di colore neutra di 3000K.

■ Matériau du corps - métal, couleur - graphite. Haut niveau de protection contre la poussière et l'humidité IP65. Résistance à la corrosion et aux variations de températures. Source de lumière LED avec une température de couleur neutre de 3000K.




■ O420WL-L12GF

LED 12 W 1050lm
t* 3000K >80Ra 87°
IP 65



■ O420WL-L7GF

LED 7 W 600lm
t* 3000K >80Ra 87°
IP 65

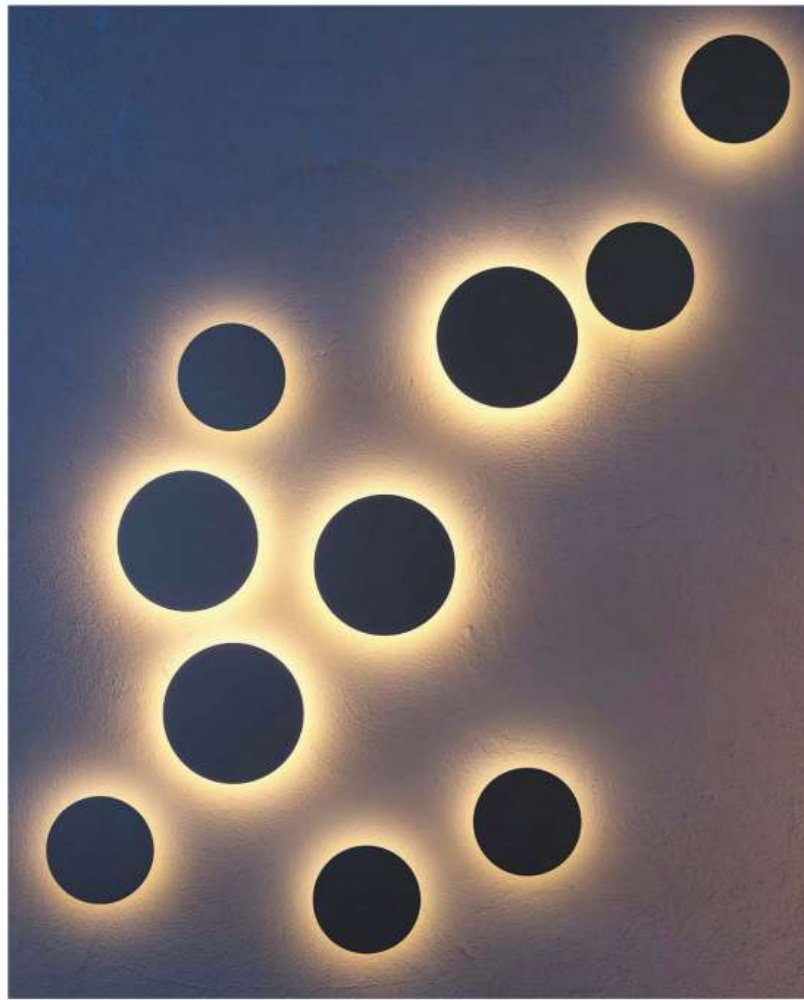

Outdoor

Architectural lighting

Times Square

B W

IP54 LED D

■ Architectural lighting. Metal body in three colors: white and black. High level IP54, protection against corrosion and temperature extremes. Bidirectional light flux.

■ Architektonische Bodenleuchten. Metallrahmen in drei Farbvarianten: Weiß und Schwarz. Hohe Schutzart IP54, Schutz gegen Korrosion und Temperaturschwankungen. Bidirektionaler Lichtstrom.

■ Illuminazione architettonica. Corpo metallico in tre tonalità: bianco e nero. Alto livello IP54, protezione dalla corrosione e dagli sbalzi di temperatura. Fluxo luminoso bidirezionale.

■ Solange architecturale. Corps métallique en trois tentes: blanc et noir. Haut niveau de protection IP54, protection contre la corrosion et les variations de températures. Flux lumineux bidirectionnel.



■ OS87WL-L6B

LED 6 W 480lm
t* 3000K >80Ra 90°
IP 54



■ OS80WL-L6B
OS80WL-L6W

LED 6 W 100lm
t* 3200K >80Ra 120°
IP 54





Talpa 801



Ziggy 411

Ziggy

Orientable miniprojector for outdoor, die-cast aluminium body painted in dark grey, equipped with COB LED, IP68 connector mounted on the power supply cable and integrated driver.




IP68 connector



MINIPROJECTOR - MINIPROJECTOR

Code: Finishing
9080 ■ Dark Grey

LED type	Input voltage	Power	Luminous Flux SourceSystem	CCT	Optics	CR
COB LED CREZ.1 pro	100-240V	15.2W	1575/965 lm	3000K	8°	82

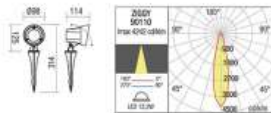

Sam

Orientable miniprojectors for exterior, IP65, equipped with COB LED and integrated driver. Die cast aluminium housing electrostatically painted in dark grey. Designed for floor, ceiling, wall or ground mounting (delivered with picket).



MINIPROJECTOR - MINIPROJECTOR

Code	Finishing	LED type	Input voltage	Power	Luminous Flux SourceSystem	CCT	Optics	CR
9492	■ Dark Grey	COB LED EPSTAR.1 pro	220-240V	8W	585/530 lm	3000K	30°	82
9494	■ Dark Grey	COB LED EPSTAR.1 pro	220-240V	8W	600/540 lm	4000K	30°	82



Outdoor

Modern lighting

Bern



• Aluminium body. Corrosion protected. Glass diffuser. Shades: white, graphite. LED light source, color temperature: 3000K. Several power levels to choose. Color rendering index: 80Ra. High degree of protection against dust and moisture: IP65.

• Aluminiumgehäuse. Korrosionsschutz. Diffusor aus Glas. Farbton: weiß, Graphit. LED-Lichtquelle. Farbtemperatur: 3000K. Mehrere Leistungsstufen zur Auswahl. Farbwiedergabeindex: 80Ra. Hoher Schutz vor Staub und Feuchtigkeit: IP65.

• Un corpo in alluminio. La protezione dalla corrosione, il diffusore e' fatto in vetro. Le tonalità' sono bianco, grafite. La sorgente luminosa e' LED, la temperatura di colore e' 3000K. I diversi grad' di potenza tra cui si puo' scegliere. L'indice di resa cromatica e' 80Ra. L'alto grado di protezione dalla polvere e' l'umidita' e' IP65.

• Corps en aluminium. Protégé contre la corrosion. Diffuseur en verre. Ajusteur - blanc, graphite. Source de lumiere LED, température de couleur - 3000K. Plusieurs niveaux de puissance au choix. Indice de rendu des couleurs - 80Ra. Haut degré de protection l'apoussière et de l'humidité - IP65.



1	0050FL-L50F3K 0050FL-L5W3K	2	0050FL-L150F3K 0050FL-L15W3K	3	0050FL-L300F3K 0050FL-L30W3K
	LED 5W 280lm 1° 3000K >80Ra 65° IP 65		LED 15W 1200lm 1° 3000K >80Ra 55° IP 65		LED 30W 2800lm 1° 3000K >80Ra 50° IP 65



Outdoor

Modern lighting

Bonn



• Body material - metal, shade - graphite. Protection against corrosion and temperature differences. High level IP65. Light source - LED module with neutral color temperature of 3000K. Trendy rectangular arch shape. The series includes outdoor lamps of various heights and power.

• Rahmengerät: Metall, Farbton: Graphit. Schutz vor Korrosion und Temperaturschwankungen. Hoher Schutzgrad IP65. Lichtquelle: LED-Modul mit einer neutralen Farbtemperatur von 3000K. Trendige Form eines rechteckigen Bogens. Die Serie umfasst Außenleuchten unterschiedlicher Höhe und Leistung.

• Materiale della cornice - metallo, tonalità - grafite. Protezione dalla corrosione e dagli sbalzi di temperatura. Alta resa di cromaticità. La sorgente luminosa è un modulo LED con temperatura di colore neutra di 3000K. Forma da arco rettangolare alla moda. La serie comprende lampioni di varie altezze e potenze.

• Matériau du corps - métal, teinte - graphite. Protection contre la corrosion et les changements de températures. Haut niveau de protection IP65. Source de lumière - module LED avec une température de couleur neutre de 3000K. Forme d'arc rectangulaire tendance. La série comprend des lampadaires extérieurs de différentes hauteurs et puissances.



1	0425FL-L250F	2	0425FL-L200F	3	0425FL-L100F
	LED 25W 1350lm 1° 3000K >80Ra 150° IP 65		LED 20W 1000lm 1° 3000K >80Ra 150° IP 65		LED 10W 550lm 1° 3000K >80Ra 150° IP 65





Foto: 410



Foto: 411

Taiga

Orientable mini-projector for exterior equipped with RGB + W, 4:1 SMD LEDs, with TUYA control system, integrated driver.
ABS housing in black color, transparent polycarbonate diffuser.
Designed for floor, ceiling, wall or ground mounting (delivered with picket and IP68 connector mounted on the power supply cable).



Available on: Works with:

MINIPROJECTOR - MINIPROJECTOR							
Code	Finishing	Heat voltage	Power	Luminous Flux Source/System	CCT	Delta	CR
90409	Black	220-240V	5W	Red: 52140 lm Green: 52120 lm Blue: 3407 lm Warm white: 80144 lm	RGB+W	33°	80




IP68 connector

Felix

Outdoor orientable mini-projector, IP65, equipped with SMD LED OSRAM and integrated driver.
Die cast aluminium body painted in dark grey.
Designed for mounting on floor, wall, ceiling or on ground (delivered with plastic picket).



MINIPROJECTOR - MINIPROJECTOR							
Code	Finishing	Heat voltage	Power	Luminous Flux Source/System	CCT	Delta	CR
9041	Dark Grey	100-240V	7W	736/420 lm	3000K	32°	80

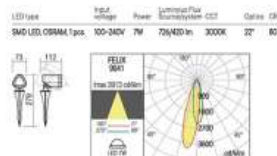

414 REDO GROUP OUTDOOR 2023

408 REDO GROUP OUTDOOR 2023



Outdoor

Modern lighting

Elbe

TR


IP65 LED 3000K

• Serie di outdoor lamps di various height. Metal body, color – graphite. High protection class IP65, protection against corrosion and temperature differences. LED light source, color temperature is 3000K. Strict geometry in design.

• Eine Serie von Außenleuchten unterschiedlicher Höhe. Metallkörper, Farbe: Graphit. Hoher Schutzgrad IP65, Schutz vor Korrosion und Temperaturschwankungen. LED-Lichtquelle mit einer Farbtemperatur von 3000K. Strenge Geometrie im Design.

• Serie di lampioni di varie altezze. Corpi in metallo, colore – grigio. Elevato grado di protezione IP65, protezione dalla corrosione e dagli sbalzi di temperatura. Sorgente luminosa a LED, temperatura di colore 3000K. Geometria rigorosa nel design.

• Série de lampadaires extérieurs de diverses hauteurs. Corps métalliques, couleur : graphite. Haute classe de protection IP65. Protection contre la corrosion et les changements de températures. Source de lumière LED, température de couleur 3000K. Design strictement géométrique.

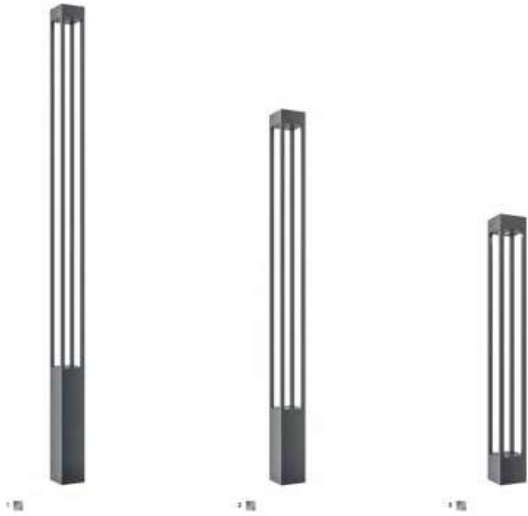

1 O424FL-L25GF

LED 25W 1500lm
1° 3000K >80Ra 36°
IP 65



2 O424FL-L20GF

LED 20W 1100lm
1° 3000K >80Ra 36°
IP 65



3 O424FL-L10GF

LED 10W 650lm
1° 3000K >80Ra 36°
IP 65



Outdoor

Modern lighting

Essen

TR GR

IP64 LED 4000K

• Body material – aluminum, shades – black, grey. IP64. Protection against corrosion and temperature differences. Light source – LED module with color temperature of 4000K. Minimalistic design. The series includes landscape lamps of various heights.

• Aluminiumrahmen, Farbton: Schwarz, Grau. IP64. Schutz vor Korrosion und Temperaturschwankungen. Lichtquelle LED-Modul mit einer realistischen Farbtemperatur von 4000K. Minimalistisches Design. Die Serie wird durch Landschaftsleuchten in verschiedenen Höhen dargestellt.

• Materiale del corpo alluminio, tonalità: nero, grigio. IP64. Protezione dalla corrosione e dagli sbalzi di temperatura. La sorgente luminosa è un modulo LED con temperatura di colore di 4000K. Design minimalista. La serie è rappresentata da lampade da esterno di varie altezze.

• Matériau du corps : aluminium, teintes : noir, gris. IP64. Protection contre la corrosion et les changements de températures. Source de lumière : module LED avec une température de couleur de 4000K. Design minimaliste. Série de luminaires paysagers proposée dans différents hauteurs.



1 O596FL-L8B4K

O596FL-L8GR4K
LED 9W 450lm
1° 4000K >80Ra 55°
IP 54



2 O596FL-L8B4K1

O596FL-L8GR4K1
LED 9W 450lm
1° 4000K >80Ra 55°
IP 54





416 REDO GROUP OUTDOOR 2023

Elfic 417

Elfic

Outdoor pickets /poles with adjustable head, possibility to be installed on the ground or on concrete. Aluminum structure electrostatic painted in dark gray, corten or dark green, satin polycarbonate diffuser. Delivered with spike for ground installation, aluminum base for concrete installation, 1 meter power supply cable H05RN-F 3 x 1 mm² and IP68 connector. Driver included.




ADJUSTABLE PICKET/POLE - PICHET/STÄLPISOR ORIENTABEL

H 900mm		Height
90464	Dark Grey	900
90465	Corten	900
90466	Dark Green	900

H 1200mm		Height
90467	Dark Grey	1200
90468	Corten	1200
90469	Dark Green	1200

LED type: Input Voltage: Power: CCF: Lifetime: Flux: Scattering: Optics: DIM

SM: LED 2835, 20 pcs 220-240V 12W 3000K M20/J20 In: 100' 80'

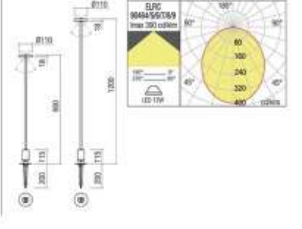

• Outdoor

Lit



Modern lighting

■ Aluminum body, shades - graphite, brown. Double lampshade made of glass. The outer one is transparent with a linear relief pattern. The inner one is a white glossy diffuser. Models with power varying from 12W to 20W designed for main lighting. LED light source, color temperature - 3000K. Protection Code - IP65.

■ Aluminiumrahmen, Farben - Graphit, Braun. Doppelter Lampenschirm aus Glas. Außenseite - transparent mit einem linearen geradlinigen Muster. Innenseite - weißer glänzender Diffusor. Modelle von 12W bis 20W - konzipiert für die Grundbeleuchtung. LED-Lichtquelle, Farbtemperatur - 3000K. Hoher Schutzgrad - IP65.

■ Il corpo è in alluminio, i colori sono grigio, marrone. Doppio paralume in vetro. L'esterno è trasparente con un motivo a rilievo lineare. L'interno è un diffusore bianco lucido. I modelli di potenza da 12 W a 20 W sono progettati per l'illuminazione principale. Sorgente luminosa a LED. La temperatura di colore è 3000K. Alto grado di protezione - IP65.

■ Corps - aluminium, couleurs - graphite, marron. Azel jour double en verre. L'extérieur est transparent avec un motif en relief linéaire. L'intérieur - un diffuseur blanc brillant. Les modèles d'une puissance de 12W à 20W sont destinés à l'éclairage principal. Source de lumière LED, température de couleur - 3000K. Haut degré de protection - IP65.



■ **O593FL-L12BR3K**
■ **O593FL-L12GF3K**

LED 12 W 600lm
t° 3000K >80Ra 90°
IP 65



■ **O593FL-L20BR3K**
■ **O593FL-L20GF3K**

LED 20 W 850lm
t° 3000K >80Ra 90°
IP 65



• Outdoor

Mill



Modern lighting

■ Aluminum body. Corrosion protection. Color: graphite. LED light source, color temperature: 3000K. High degree of protection against dust and moisture: IP65. Two power options. Designed for basic lighting of suburban areas.

■ Aluminiumgehäuse. Korrosionsschutz. Graphitfarben. LED-Lichtquelle. Farbtemperatur - 3000K. Hoher Schutzgrad vor Staub und Feuchtigkeit: IP65. Zwei Leistungsstufen. Bestimmt für die Beleuchtung der außerstädtischen Grundstücke.

■ Il corpo è fatto in alluminio. Una protezione anticorrosione. Il colore è grigio. La sorgente luminosa è a LED, la temperatura di colore è 3000K. Alto grado di protezione dall'umidità e dalla polvere - IP65. Le due opzioni di una potenza. Progettato per l'illuminazione generale delle aree suburbane.

■ Corps en aluminium. Protection contre la corrosion. Couleur - graphite. Source de lumière LED, température de couleur - 3000K. Haut degré de protection contre l'humidité et la poussière - IP65. Deux options de puissance. Conçu pour l'éclairage principal des zones suburbaines.



■ **O427FL-L12GF3K**

LED 12 W 1000lm
t° 3000K >80Ra 36°
IP 65




■ **O427FL-L30GF3K**

LED 30 W 2200lm
t° 3000K >80Ra 36°
IP 65






Torch

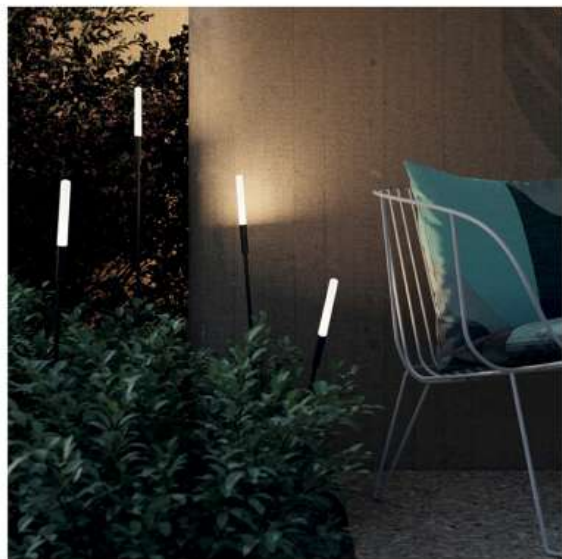

PICHET - PICHET

Code	Finishing
90462	Dark Grey
90463	Corten
90464	Dark Green


LED type	Input voltage	Power	CCT	Luminous Flux lumens/beam	CS
ITE CREE LED, 1px	24V DC	15W	3000K	1440lm	80

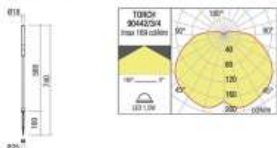

PICHET - PICHET

Code	Finishing
90465	Dark Grey
90466	Corten
90467	Dark Green


LED type	Input voltage	Power	CCT	Luminous Flux lumens/beam	CS
ITE CREE LED, 1px	24V DC	15W	3000K	1440lm	80

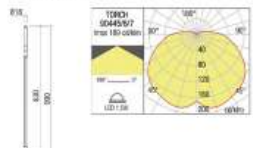

PICHET - PICHET

Code	Finishing
90468	Dark Grey
90469	Corten
90470	Dark Green

LED type	Input voltage	Power	CCT	Luminous Flux lumens/beam	CS
ITE CREE LED, 1px	24V DC	15W	3000K	1440lm	80






FREDO 58 IP54 4000K

voltage: 230V	LED 6W 390lm 4000K	LED integrated
IP54		LED
technical specification	installation: 	
	beam angle: 120°	

COLOUR / NEW INDEX NO.

■ BLACK (BK) .




FREDO 98 IP54 4000K

voltage: 230V	LED 12W 780lm 4000K	LED integrated
IP54		LED
technical specification	installation: 	
	beam angle: 120°	

COLOUR / NEW INDEX NO.

■ BLACK (BK) .







388 REDO GROUP OUTDOOR 2023



388 REDO GROUP OUTDOOR 2023



